

Road Paver Wheeled AFW 500 E/G

The machine of this class is ideal for medium-high size job sites where a good manoeuvrability together with high performances are requested. Due to its excellent weight distribution and wheeled traction options (4x6 and 6x6), it is very easy to handle and able to pave till 6.5 m of width in a big range of applications.



The machine has three axles: front, two axles for steering and rear, axle for traction. The rear axle is fitted with large pneumatic tyres so that the machine can be driven also on soft grounds. On the front oscillating axles are fitted large full rubber tyres. The steering system with a hydraulic pump gives a smooth control when turning. The hoppers are independently controlled by an electric-hydraulic system. The front truck pushing rollers are adjustable and oscillating.



APPLICATIONS

layers of final wearing course, binder, tout-venant as well as draining asphalt on:

freeways and national roads

large squares

civil and industrial building

lots, big parking areas

Two adjustable seats, left and right, can slide externally. The dashboard is adjustable to the seat position to allow easy operations. Ground controls with anti-vandal guards for the road operator. Hydraulic foldable canopy with rear supports to ensure good visibility.

Feeding of material


The feeding system of the material: two independent and reverse chain belt conveyors, controlled by paddle microswitches, and the augers, controlled by two proportional ultrasonic, regulate the flow of material to the screed in order to maintain the most effective distribution of the material in any condition. The height of the auger group is electric-hydraulically adjustable.

Screed options

Screed with tamper and vibration (FST), or with vibration only (FSV), with gas or electric heating, automatic lighting and temperature control, ISR system (Screed Assist) with pressure adjustment.

Technical specification


Dimensions:

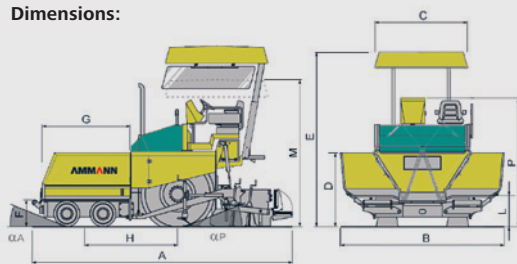

A	B	C	D	E	F	G	H	L	M
6040	3240	2550	1630	3520	506	2000	1900	610	3100
P	αA	αP							
2620	15°	15°							

Screed Options: FSV 500 E/G; FST 500 E/G

Max paving widths:



Equipment
Standard
Automatic heating control
Augers height hydraulically adjustable
Proportional ultrasonic augers control
ISR system (Screed Assist)
Hydraulic folding canopy
Optional
Four wheel drive (DT)
6 wheel drive (DTI)
Longitudinal levelling system
Slope control system
Reduction plates at 1500 mm
Mechanical extensions 2x800 mm
Electric-hydraulic camber adjustment
Rotating screed side end plates

Wheeled Paver AFW 500 E/G

Length (transport)	mm	5860
Dimensions		(see ill.)
Engine		
Manufacturer		Cummins QSB4.5
Type		Diesel, Turbo-Intercooler, electronic control
No. of cylinders		4
Power (DIN/ISO 3046/1) at 2200 rpm	kW	119 (160 PS)
Max torque		Nm 457 at 1500 rpm
Generator		24V-70 A
Brakes		
Service brake		Hydrostatic
Parking brake/Emergency		Multiple disks negative brake on reduction gears
Traction - Steering		
Transmission type		Hydrostatic
Steering type		Hydraulic
Internal turning radius	m	3.70
Performances		
Production	t/h	500
Layer thickness	mm	5-300
Hopper capacity	t	12
Max Speed (transfer)	km/h	14
Max Speed (work)	m/min.	40
Tank capacity		
Fuel tank	l	200
Hydraulic oil	l	170
Ecological liquid	l	30
Wheels		
Traction		17.5 - R25
Steering		Ø 530 x 300
Weights (CECE)		
Paver with screed	kg	15000

